

DH-IPC-HFW1839TC-A-IL-BLACK

8MP Entry Smart Dual Light Fixed-focal Bullet Network Camera



Series Overview

With features of simple installation, easy operation, and high performance-cost ratio, Dahua Entry series network camera is applicable to small and medium-sized scenes, such as homes/residences, small-sized retail stores, and other small and medium-sized enterprises.

Functions

Smart Dual Light

Dahua Smart Dual Light technology adopts smart algorithm to detect targets. Usually, the IR illuminator is on at night; when the target appears in the monitoring area, the white light is on, and the camera records the full-color video and information of key events. That is, the camera links snapshot and video with full-color image. When the target is out of the monitoring area, the white light is off and the IR illuminator is on, which reduces light pollution efficiently.

Human Detection

Dahua intelligent algorithms extract moving human targets from videos and filters out alarms that are triggered by non-human targets to increase the accuracy and effectiveness of alarms.

Smart H.265+ & Smart H.264+

With advanced scene-adaptive rate control algorithm, Dahua smart encoding technology realizes the higher encoding efficiency than H.265 and H.264, provides high-quality video, and reduces the cost of storage and transmission.

Image Flip

For narrow and long scenes, Dahua image flip technology flips the image by 90°/180°/270° to realize better surveillance in rotation mode.

* The parameters and datasheets below can only be applied to 1839-S6 series.

- 8-MP 1/2.7" CMOS image sensor, low luminance, and high definition image.
- Outputs max. 8 MP (3840 × 2160) @20 fps, and supports 2688 × 1520@25/30 fps.
- H.265 codec, high compression rate, ultra-low bit rate.
- Built-in multi-core light, the max. IR distance is 30 m and the max. warm light distance is 30 m.
- Rotation mode, DWDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes.
- ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments.
- Built in Mic.
- 12 VDC/PoE power supply, easy for installation.
- IP67 protection.
- Supports human detection.



Cyber Security

Dahua network cameras employ a series of security technologies, including security authentication and authorization, access control protocols, trusted protection, encrypted transmission and encrypted storage. These technologies improve the camera's defense against external cyber threats and prevent malicious programs from compromising the device.

Protection (IP67, Wide Voltage)

IP67: The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can work normally after soaking in 1 m deep water for 30 minutes.

Wide voltage: The camera allows ±30% (for some power supplies) input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with instable voltage.

Technical Specification										
Camera										
Image Sensor										
Max. Resolution										
ROM										
RAM										
Scanning System										
Electronic Shutter Speed										
Min. Illumination										
S/N Ratio										
Illumination Distance										
Illuminator On/Off Control										
Illuminator Number										
Angle Adjustment										
Lens										
Lens Type										
Lens Mount										
Focal Length										
Max. Aperture										
Field of View										
Iris Control										
Close Focus Distance										
DORI Distance	Lens		Detect	Observe	Recognize					
	2.8 mm		84.8 m (278.22 ft)	33.9 m (111.22 ft)	17.0 m (55.77 ft)					
	3.6 mm		98.7 m (323.82 ft)	39.5 m (129.59 ft)	19.7 m (64.63 ft)					
	*DORI (Detect, Observe, Recognize, Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The numbers in this table do not reflect intelligent function distances. For intelligent function distances, refer to installation and commissioning manual/project design tool.									
Intelligence										
Human Detection										
Smart Search										
Video										
Video Compression										
Smart Codec										
Video Frame Rate										
Stream Capability										
Resolution										
Bit Rate Control										
Video Bit Rate										
Day/Night										
BLC										
HLC										
WDR										
White Balance										
Gain Control										
Noise Reduction										
Motion Detection										
Region of Interest (RoI)										
Smart Illumination										
Image Rotation										
Mirror										
Privacy Masking										
Audio										
Built-in MIC										
Audio Compression										
Alarm										
Alarm Event										
Network										
Network Port										
SDK and API										
Network Protocol										
Interoperability										
User/Host										
Storage										

Entry Series | DH-IPC-HFW1839TC-A-IL

Browser	IE; Chrome; Firefox
Management Software	Smart PSS Lite; DSS; DMSS; DoLynk Care
Mobile Client	iOS;Android
Cyber Security	Video encryption;Configuration encryption;Digest;WSSE;Account lockout;Security logs;Generation and importing of X.509 certification;HTTPS;Trusted boot;Trusted execution;Trusted upgrade
Certification	
Certifications	CE-LVD: EN62368-1; CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU
Power	
Power Supply	12 VDC/PoE (802.3af)
Power Consumption	Basic: 2.5 W (12 VDC), 3.5 W (PoE); Max.: 4.5 W (12 VDC), 5.8 W (PoE) (H.265 + intelligence on+ DWDR + illuminator intensity)
Environment	
Operating Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Operating Humidity	≤95%(RH), non-condensing
Storage Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Storage Humidity	≤95%(RH), non-condensing
Protection	IP67
Structure	
Casing Material	Metal
Product Dimensions	173.3 mm × 70.0 mm × 70.0 mm (6.82" × 2.76" × 2.76") (L × W × H)
Net Weight	0.46 kg (1.01 lb)
Gross Weight	0.57 kg (1.26 lb)

Ordering Information

Type	Model	Description
IP CAMERA	DH-IPC-HFW1839TC-A-IL	8MP Entry Smart Dual Light Fixed-focal Bullet Network Camera
	G3416GW	G3/4" Water Joint
	DH-PFA151	Corner mount bracket
	DH-PFA130-E	Water-proof Junction Box
	DH-PFA152-E	Pole Mount Bracket
Accessories (Optional)	DH-PFA134	Junction box
	DH-PFM321-EN	DC12V1A power adapter
	DH-PFM321D-EN	DC12V 1A power adapter
	DH-PFM320D-EN	DC12V2A power adapter
	PFM900-E	Integrated Mount Tester

Accessories

Optional:



DH-PFA151
Corner mount bracket



DH-PFA130-E
Water-proof Junction Box



DH-PFA152-E
Pole Mount Bracket



DH-PFA134
Junction box



DH-PFM321-EN
DC12V1A power adapter




DH-PFM321D-EN
DC12V 1A power adapter



DH-PFM320D-EN
DC12V2A power adapter



PFM900-E
Integrated Mount Tester

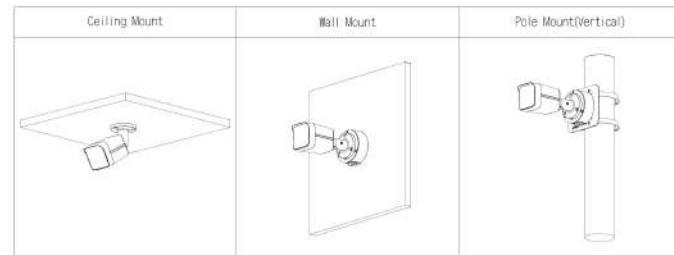

Dimensions (mm[inch])

